



REED SWITCH DEVELOPMENTS CORP.

2524 Norwood Court
Racine, WI 53403
Ph: (262)883-9060

sales@reedswitchdevelopments.com

SPECIFICATION SHEET

2602-1051-400

Alternate Part Number:

AM2602-1051-10K01

Active / Equivalent Part Numbers:

2602-1051-400 - KIT - Contains

(1) 2602-1051-100 - Magnetic Reed Sensor

(1) 2602-4002-000 - Magnetic Actuator

AM2602-1051-10K01 - KIT - Contains


(1) AM2602-1051-10-01 - Magnetic Reed Sensor

(1) AM2602-4002-00-01 - Magnetic Actuator

Sensor (Reed) - Specifications 1051

Physical		Operating		Electrical	
Configuration	SPST	DC Contact Rating	15	W	
Form	A	AC Contact Rating	N/A	VA	
Contact Position	CENTER	DC Switching Voltage	200	VDC	
Glass L	14.50	AC Switching Voltage	140	VAC	
Glass D	2.54	DC Switching Current	1.00	A	
Total L*	46.00	AC Switching Current	1.00	A	
Wire D	0.60	DC Max Carry Current	1.75	A	
Gap Location	CENTER	AC Max Carry Current	1.75	A	
Mount Spec*	THRU	Min Breakdown Voltage	275	VDC	
Contact Material	RUTHENIUM	Max Initial Contact Resistance	100	mOhm	
Max Vibration Resistance	10	Typical Initial Contact Resistance	70	mOhm	
Max Shock Resistance (11ms)	150	Max Contact Capacitance	0.30	pF	
Lead Tensile Strength	N/A	Min Insulation Resistance	10 ⁶	Ohm	
Pull in (+/- 2AT)*	15 - 23				
Drop out*	7.5-17.5				
Operate Time	0.10				
Bounce Time	0.15				
Release Time	30				
Resonant Frequency	5100				
Max Operating Frequency	N/A				
Operating Temperature Range	-55 - 105				
Storage Temperature	N/A				

* Pre-processed, bare reed element

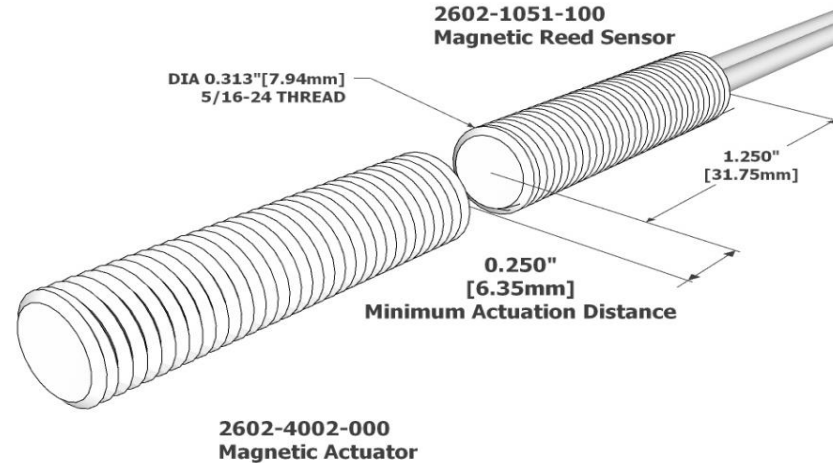

All measurements are in Inches [millimeters]

Sensor - Wire/Cable Characteristics (cont.)

Type	Wire
Conductor Count	2
Length	6.0"/152.4mm
Colors	BLK
Insulation Material	PVC
Gauge	24 AWG
Stranded Copper	7 STR-TC
Maximum Temp	105°C

Housing Characteristics 2602

Cylindrical Threaded (5/16-24)	
Length / Thickness	1.250"/31.75mm
Diameter	0.313"/7.94mm
Material	Stainless Steel

Standard Actuator: 2602-4002-000

Specifications	Description	UM
Magnetic Orientation	Through Length	
Max Operating Temp.	975/525	°F/°C
Curie Temp.	1580/860	°F/°C
BR max	12.8	kGauss
BH max	5.5	MGOe
Coercive Force Hc	640	kOe
Intrinsic Coercive Force Hci	640	kOe
Standard Sensor/Actuator - Min. Actuation Distance		
2602-4002-000	0.25"/6.4mm	
Assembly Certifications		
UL Recognized (File #: E102207)	Y	
RoHS / Reach Compliant	Y	
Conflict Free Material	Y	

REV DATE: 10/06/2021

DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

WBE Certified - State of Wisconsin - MFR CAGE CODE: 32604

www.reedswitchdevelopments.com