# REED SWITCH DEVELOPMENTS CORP. 2524 Norwood Court

Racine, WI 53403 Ph: (262)883-9060

sales@reedswitchdevelopments.com


	Sensor (Reed) - Specifications	19	01
	Configuration	SP	ST
	Form	В	
	Contact Position	OFFSET	
	Glass L	14.00	mm
	Glass D	2.30 mm	
<u>8</u>	Total L*	55.00	mm
Physical	Wire D	0.53	mm
문	Gap Location		
	Mount Spec*	THRU	
	Contact Material	RHOD	NUI
	Max Vibration Resistance	20	G
	Max Shock Resistance (11ms)	50	G
	Lead Tensile Strength	N/A	KG
	Pull in (+/- 2AT)*	15-20	AT
	Drop out*	5	AT
l	Operate Time	2.0	ms
ing	Bounce Time	0.60	ms
rat	Release Time	0.50	μs
Operating	Resonant Frequency	N/A	Hz
ľ	Max Operating Frequency	250	Hz
	Operating Temperature Range	-40 - 105	°C
	Storage Temperature	N/A	°C
	DC Contact Rating	20	W
	AC Contact Rating	20	VA
	DC Switching Voltage	150	VDC
	AC Switching Voltage	150	VAC
	DC Switching Current	1.00	Α
g	AC Switching Current	1.00	Α
Electrica	DC Max Carry Current	2.00	Α
E E	AC Max Carry Current	2.00	Α
	Min Breakdown Voltage	200	VDC
	Max Initial Contact Resistance	150	mOhm
	Typical Initial Contact Resistance	N/A	mOhm
	Max Contact Capacitance	0.80	pF
L	Min Insulation Resistance	10^9	Ohm
_			

## **SPECIFICATION SHEET**

2052-1901-900

Alternate Part Number: 3730-2052-1901-900-ND

**Active / Equivalent Part Numbers:** 2052-1901-900 - Magnetic Reed Sensor Only 3730-2052-1901-900-ND - Magnetic Reed Sensor Only

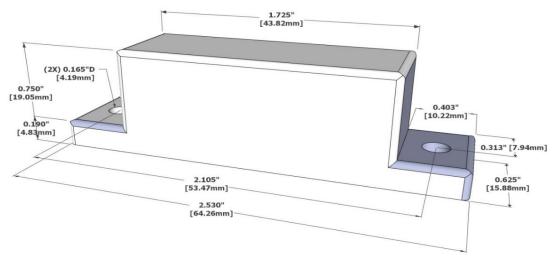

All measurements are in Inches [millimeters]

#### Sensor - Wire/Cable Characteristics (cont.)

Туре	Cable
Conductor Count	2
Length	18.0"/457.2mm
Colors	BLK, RED
Insulation Material	PVC
Gauge	20 AWG
Stranded Copper	19 STR
Maximum Temp	105°C
· · · · · · · · · · · · · · · · · · ·	

<b>Housing Characteristics</b>	2052
--------------------------------	------

Rectangular w/ Mounting Tabs/Holes	
Length	2.530"/64.26mm
Width	0.625"/15.88mm
Height	0.750"/19.05mm
Material	Celanex 3316

#### **Conductor Configuration**

2053-4109-000

	Common (COM) - RED
ĺ	Normally Closed (NC) - BLACK

#### For More Information Visit:

www.reedswitchdevelopments.com

Or Call Us At: 262-883-9060

### Standard Sensor/Actuator - Min. Actuation Distance

Assembly Certifications	
UL Recognized (File #: E102207)	Υ
RoHS / Reach Compliant	Υ
Caudiat Fusa Matarial	V

REV DATE: 05/16/2023

0.81"/20.6mm

<sup>\*</sup> Pre-processed, bare reed element DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.